

Pro Helmets LLC.
5656 Opportunity Drive
Toledo, Ohio 43612
Cage# 6BDU1
www.pthelmets.com



Saving Lives One Helmet at a Time! ®

Toll Free: 1.888.752.4090
Com: 419.476.7790
Fax: 419.476.7795
Op: 9:00a - 5:30p EST

PT A-BRAVO HELMETS w/ SWIFT LINERS



MFP# 4811931MIL PT A-Bravo Helmet (IMMERSIBLE BUMP HELMET)
NSN# 4220-01-580-3860 Size XLARGE
4220-01-580-3856 Size Large
4220-01-580-3853 Size Medium
Sizes Available: Small, Medium, Large, XL, XXL

MFP# 4811931HSMIL PT A-Bravo Half Shell (Accommodates Headsets)



- Black Zinc Phillips Bolts / Lock Down Keps Nuts (no rust or popping rivets)
- SWIFT Water Liner is Anti-Flammable, Anti-Bacterial, Non Toxic, Chemical Resistant
- Strong Non-Cracking Plastic for Drilling & Custom Applications
- Dynamic Air Porting Keeps You Cool
- Free Flow Water Holes - Non Anchoring for Cast & Recovery
- Strong 500Lb Nylon & Rubber Nape for Diving, Sub Lockout
- Decontaminate Oil, Blood, Chemicals, Bleach
- New PT 6 Pt. Instant Ditch Chin Strap W/ Removable Chin Cup & Durable Rubber Nape
- Bungee Goggle Holder / Molle Fastener
- Half Shell Accommodates DC, Lightspeed (MOD), Bose, Sordin, Peltor Headsets
- HAHO / HALO Jump Tested 20,000 +
- Non-Restriction of Parachute Lines
- Links to MBU-12/P, NATO Oxygen Mask, Divator
- Weight (w/Rails) 15 ounces
- Pre-Drill PVS 7/14/15/18 & ANVIS Systems
- 1913 Picatinny Rail Mount
- Complete Field Strippable
- Accommodates Norotos, Wilcox, Tactical Lights, & Strobes

Colors: Matte Black, Desert Tan, Urban Gray, OD Green, Matte Red

Helmet Shell Rating: ASTM D 4976

- Density - ASTM D1505
- Tensile Strength - 4,100 PSI, ASTM D638
- Softening Temperature - 257°F, 125°C, ASTM D1525
- Brittle Temperature - 103°F, 75°C, ASTM D746
- Flexural Modulus - 185,000 PSI, 1,270 Mpa, ASTM D790
- Stress Crack Resistance - 20h, ASTM D1693



Comparable Helmet Certifications:

- ASTM F1492
- CEEN 1385
- ANSI Z89.1 (Holeless)
- NFPA 1951
- HALO / Para Training
- Water Operations
- Rappelling / Climbing / Hard Hat
- Nuclear Facility / HAZMAT

Pro Helmets LLC.
5656 Opportunity Drive
Toledo, Ohio 43612
Cage# 6BDU1
www.pthelmets.com



Saving Lives One Helmet at a Time! ®


Toll Free: 1.888.752.4090
Com: 419.476.7790
Fax: 419.476.7795
Op: 9:00a - 5:30p EST

Options:



MFP# GDNCL200 Guardian LightSpeed Combo Laser 200 Lumen

- Bright Tactical Light 200 Lumen
- 5MW Red Laser 650NM - RANGE 100M
- Connects to Picatinny / Weaver Rails / Handgun with PushLock Interface
- Lightest Tac Light Combo on the Market – 3oz's
- Simple Thumb Dial for Modes w/ Safety
- 3 Modes - Light, Laser, or Combo
- Water Resistant Durable Polymer Construction
- 2 x CR123A Lithium Battery 20,000 Hr Bulb Life

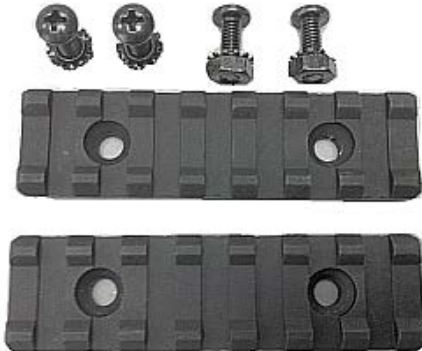

MFP# 4811931PRM PT MIL STD 1913 Picatinny Rail Mount

- The Standard Picatinny Rail Since 1995
- Lightweight Aircraft Aluminum Grade Construction
- Phillips Bolts w/ Locking Keys Nuts



MFP# 1817010 Norotos Universal Shroud for Night Vision Mounting

- Lightweight High Strength Polymer Shroud
- Interface High-Strength, Corrosion-Resistant Anodized Aluminum Alloy
- NSN: 5855-01-569-7751 TAN
- NSN: 5855-01-569-7729 BLACK